

Croydon





Borough Officer: **Derek Stidder**



At the LB Croydon, the design and provision of cycling facilities falls under the remit of the Environmental Transport Team, which forms part of the Planning & Transportation Department. The scheme design work is carried out by a combination of both permanent staff and external consultants depending upon the extent of the schemes and the general workload of the team. The main issue for delivery is the reluctance of the public to accept cycling as a sustainable form of transport and they are only too ready to object to schemes during consultation. We continue

to work closely with the Croydon Cycling Campaign who we maintain an open dialogue with during the early planning stages of LCN+ schemes. The new cycling facilities in Mitcham Road have been well received and a 1.5m wide advisory cycle lane has been achieved despite the road width and the high volume of traffic. After consultation with London Buses during the CRISP process, we were able to incorporate bus boarders at several locations. Our asset management resurfacing work has provided improvement of the LCN+ routes throughout the borough. A council led Cycle Forum is held on a regular basis to ensure that the channel of communication with the local cycle groups and stakeholders is maintained from the CRISP stage through to scheme implementation.

Asset Management Links 40 to 46,277,278

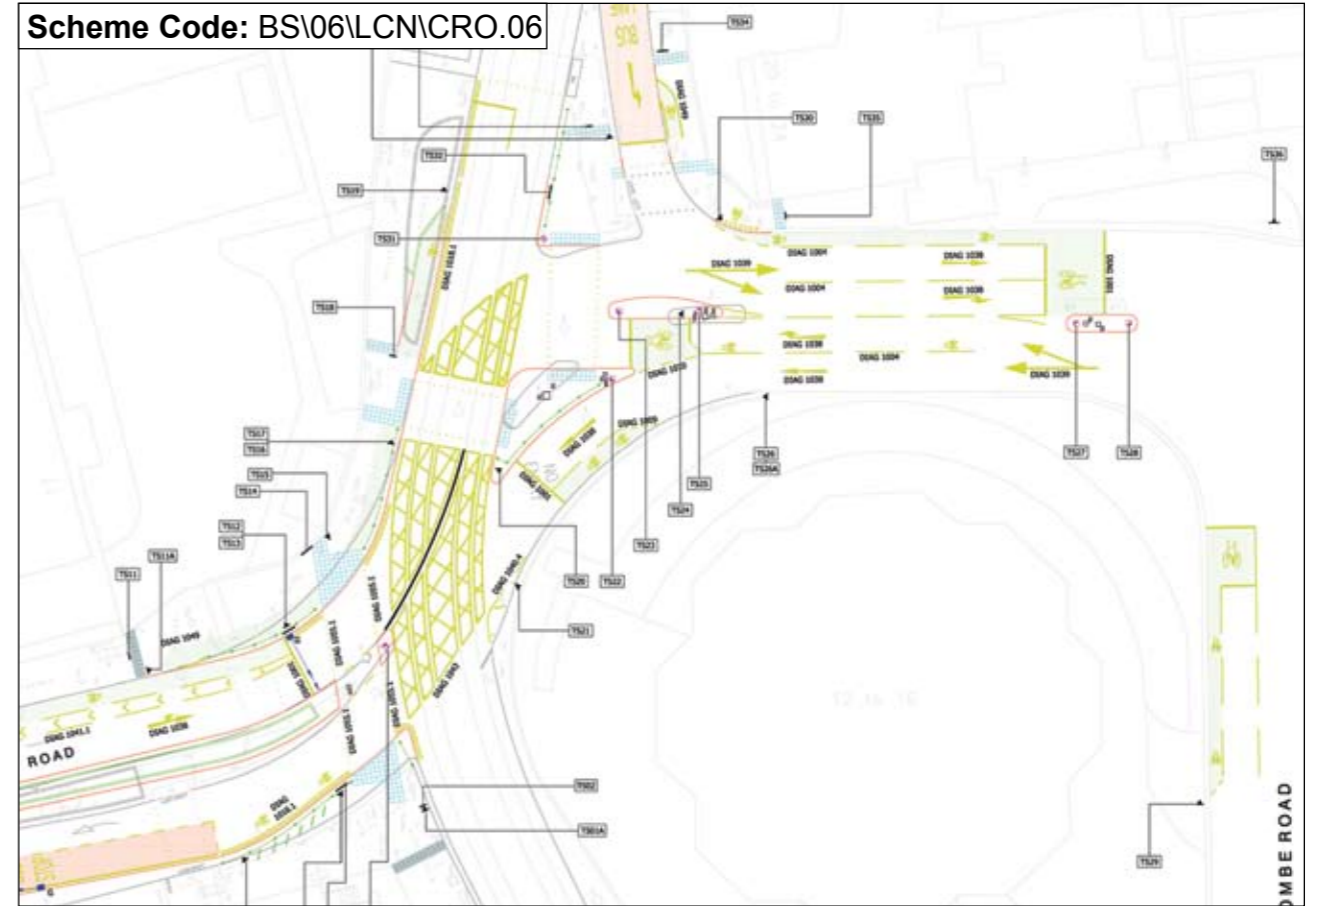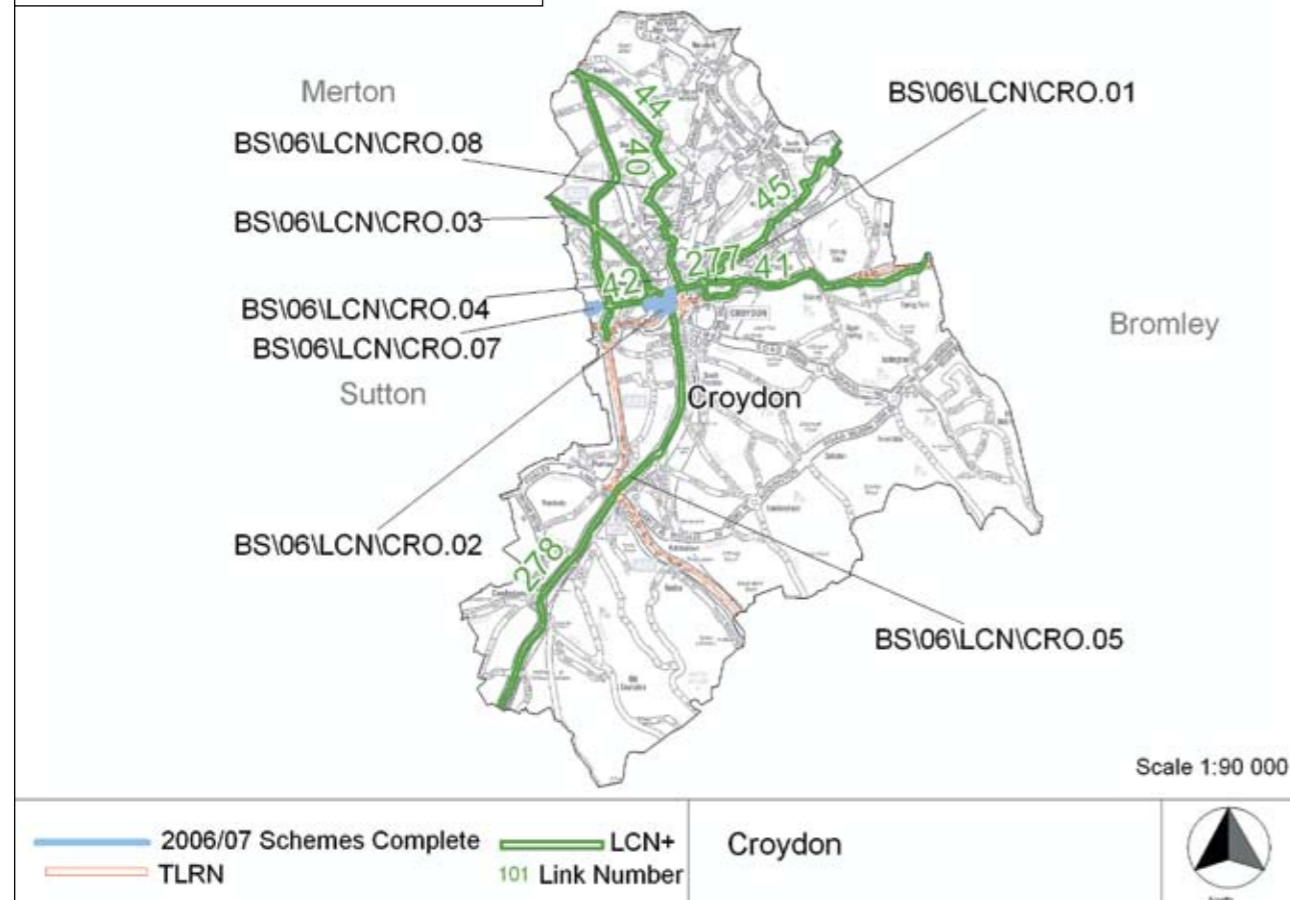

Scheme Code: BS\06\LCN\CRO.06

Link Number: 41

Location: Cherry Orchard Road j/w Addiscombe Road

Description: Implementation of large junction improvement scheme to deliver cycle facilities. Implementation to be completed in 2007.

Cost: £230,000 **Length:** 0.13km

Scheme Code: BS\06\LCN\CRO.01

Link Number: 45, 46

Location: Long Lane to East Croydon railway station

Description: Detailed design complete for two schemes, readjustment of traffic signals layout and junction alterations.

Cost: £15,000 **Length:** 2.71km

Scheme Code: BS\06\LCN\CRO.09

Link Number: 40, 41, 42, 43, 44, 45, 46, 277, 278

Description: Asset management works focussed on surface condition improvements.

Cost: £37,810 **Length:** 23.5km

Scheme Code: BS\06\LCN\CRO.03



Scheme Code: BS\06\LCN\CRO.03



Scheme Code: BS\06\LCN\CRO.03
Link Number: 43
Location: A236 Mitcham Road at Croydon Boundary to Sumner Road
Description: Scheme partly implemented, including junction improvements, 1.5m advisory cycle lanes, traffic islands and side road entry treatments. The outstanding cycling measures have been delayed due to extensive Thames Water mains replacement works.
Cost: £145,000
Length: 1.09km

Scheme Code: BS\06\LCN\CRO.07



Scheme Code: BS\06\LCN\CRO.07
Link Number: 42
Location: Bridle Path
Description: Widening of footway to facilitate cycling.
Cost: £100,000 **Length:** 0.18km

Scheme Code: BS\06\LCN\CRO.02
Link Number: 42
Location: Roman Way to Mill Lane
Description: Cycle directional signage scheme.
Cost: £10,000 **Length:** 0.93km

Scheme Code: BS\06\LCN\CRO.04
Link Number: 44
Location: North End Rd
Description: Ongoing consultation to implement cycling through pedestrianised area.
Cost: £10,000 **Length:** 0.46km

Scheme Code: BS\06\LCN\CRO.05
Link Number: 278
Location: Purley Town Centre to Croydon Town Centre
Description: Scheme Deferred. Designs to be deferred to 2007/08 due to delays on the CRISP study.
Cost: £10,000

CRISP: BS\06\LCN\CRO.08
Link Number: 44
Description: CRISP Study commissioned.
Cost: £1,000 **Length:** 8.4km